



YUNBAI HOME

云白家居

ENGLISH EDITION

FOSHAN, CHINA · BUILDING MATERIALS EXPORT

Doors & Windows Collection

Multilingual edition — translated introduction, followed by the complete product album

WhatsApp

+86 139 2587 2677

Email

info@yunbaihome.com

Address

Nanhai District, Foshan, Guangdong, China

Terms

FOB · CIF · DDP · LCL / FCL

WHO WE ARE

A Foshan export partner for the whole home

YUNBAI HOME is based in Nanhai, Foshan, Guangdong — the heart of China's building-materials and furniture industry. We export full-category building materials and made-to-measure whole-house interiors: kitchens, wardrobes, doors and windows, tiles, stone, flooring, bathrooms, lighting and soft furnishings, with design, QC, export documents and global delivery handled by one team.

15+

15+ years export experience

14

14 product categories in one order

60+

60+ destination countries

500+

500+ homes & projects supplied

HOW TO ORDER

01

Inquiry

Send model photos & room dimensions — quotation within 24 hours

02

Order & deposit

Confirm finishes & proforma invoice, pay deposit

03

Production & QC

Production, progress photos & pre-shipment inspection

04

Delivery

Balance payment & shipment — FOB · CIF · DDP

THIS COLLECTION

01 Aluminum windows & sliding systems
casement, sliding and tilt-turn windows with thermal break

02 Entrance & interior doors
security entry doors and interior wood/ aluminum doors

03 Finishes, hardware & glazing
color options, hardware brands and double/triple glazing

Features & options

✓ Sizes, colors and glazing customized per project

✓ OEM profiles, hardware and quantities; samples before production

✓ Mixed-container orders together with kitchens, wardrobes and bathrooms

HOW TO READ THIS ALBUM

Doors & Windows Collection

The following pages are the original product album. Each spread shows product photos and model codes. Product photos are universal: send us the model photo or code together with your opening dimensions, and we will confirm specifications, finishes and pricing.

Technical parameters on the source pages follow the manufacturer's standards and are reconfirmed per order.

CONTACT YUNBAI HOME



WhatsApp +86 139 2587 2677



Email info@yunbaihome.com



Address Nanhai District, Foshan, Guangdong, China



Hours Mon – Sat, 9:00 – 18:00 (GMT+8)



WeChat



YUNBAI HOME
云白家居





Quality Suppliers

We select high-quality materials and accessories from worldwide top suppliers and ensure the high quality of products from the source.

GU
GUTHRIE

KIN LONG

AkzoNobel

SIEGENIA
brings spaces to life

TUTOR SOFT

HANS



GIESSE

VIBH

XUG



GTI

STAFORCE

HOPO



wehag
SINCE 1749

CMECH

TECHNOFORM

ZHEYOU
PLASTIC

Haida

HOPPE





EIGHT MAJOR SYSTEMS

Unique technology constantly innovates and product supply system develops ideal system door and window solutions for you



AESTHETICS

The study of beauty is a pursuit to enhance the quality of life. To understand our lives through creation and communication, in a world where doors and windows are no longer made of cold aluminum.



ENERGY CONSERVATION

Energy conservation and environmental protection, warm in winter and cool in summer. Whether it's the cold winter in the north or the sunny days in the south, people pursue warm in winter and cool in summer. Energy conserva-



WIND PRESSURE RESISTANCE

Strict selection of high-quality aluminum materials, super national standard wall thickness, scientific research and development design, make the product have excellent wind pressure resistance, and always be as



WATERTIGHT

Multi channel sealing structure makes you feel safe in the face of bad weather. When rainstorm comes, good water tightness will prevent outdoor rainwater from seeping in and keep the interior dry.



INTELLIGENT

Starting from the essence of life, putting people first, using advanced intelligent technology to gradually enhance the experience of life.



SOUND INSULATION

Staying away from the hustle and bustle of the city is the inner desire of urban hardworking people. Therefore, we choose automotive grade rubber strips and PA66 insulation strips, Combined with tempered glass for multiple sound




SECURE

Everything is centered around safety, guarding indoor safety, and more importantly Ensuring the safety of family members' use with meticulous design to guarantee perfection lose



SERVICE

Provide efficient and professional services, offer one-on-one dedicated person docking service, provide one-stop procurement service, and solve your problems.

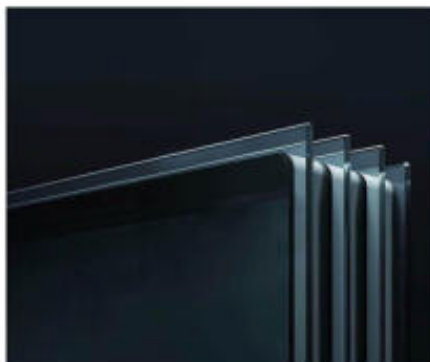



System Window series

65 THERMAL BREAK SYSTEM CASEMENT WINDOW	09
65 THERMAL BREAK SYSTEM TOP-HUNG WINDOW	11
65 THERMAL BREAK SYSTEM WITH DOUBLE INTERNAL WINDOWS	13
90 THERMAL BREAK SYSTEM CASEMENT WINDOW (NFRC\CSA)	15
90 THERMAL BREAK SYSTEM TOP-HUNG WINDOW (NFRC\CSA)	17
90 THERMAL BREAK SYSTEM WITH tilt&turn WINDOWS (NFRC\CSA)	19
90 THERMAL BREAK SYSTEM AMERICAN -STYLE HAND-CRANKED WINDOW	21
100 THERMAL BREAK SYSTEM AMERICAN -STYLE HAND-CRANKED WINDOW	23
100 THERMAL BREAK SYSTEM AMERICAN -STYLE HAND-CRANKED TOP-HUNG WINDOW	25
108 THERMAL BREAK SYSTEM CASEMENT WINDOW (CSA CERTIFICATE)	27
108 THERMAL BREAK SYSTEM TOP-HUNG WINDOW (CSA CERTIFICATE)	29
136 THERMAL BREAK SYSTEM WINDOW WITH SCREEN	31
55 NON THERMAL BREAK CASEMENT WINDOW (CS2047)	33
55 NON THERMAL BREAK TOP-HUNG WINDOW (CS2047)	35
100 NON THERMAL BREAK CASEMENT WINDOW	37
100 NON THERMAL BREAK TOP-HUNG WINDOW	39
100 NON THERMAL BREAK LOUVER WINDOW	41
A565 THERMAL BREAK SYSTEM TOP-HUNG WINDOW	43

Sliding Window series

80 THERMAL BREAK SYSTEM SLIDING WINDOW	45
150 THERMAL BREAK SYSTEM SLIDING WINDOW	47
87 NON THERMAL BREAK SLIDING WINDOW	49

Folding Window series

80 THERMAL BREAK SYSTEM FOLDING WINDOW	51
--	----

Flat door series

65 THERMAL BREAK SYSTEM SWING DOOR	53
90 THERMAL BREAK SYSTEM SWING DOOR	55
A565 THERMAL BREAK SYSTEM SWING DOOR	57
100 NON THERMAL BREAK SWING DOOR	59

Sliding door series

150 THERMAL BREAK SYSTEM SLIDING DOOR	61
125 THERMAL BREAK SYSTEM PANORAMIC DOOR	63
100 NON THERMAL BREAK SLIDING DOOR	65
110 NON THERMAL BREAK SLIDING DOOR	67

Folding door series

80 THERMAL BREAK SYSTEM FOLDING DOOR	69
--------------------------------------	----



65 THERMAL BREAK SYSTEM CASEMENT WINDOW

PRODUCT PARAMETER

- Frame size:65mm
- Thickness:2.0
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600-900mm
- Blade height:600-1800mm
- Hardware: Kin long
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENNING TYPE



MESH OPTION



PRODUCT HARDWARE

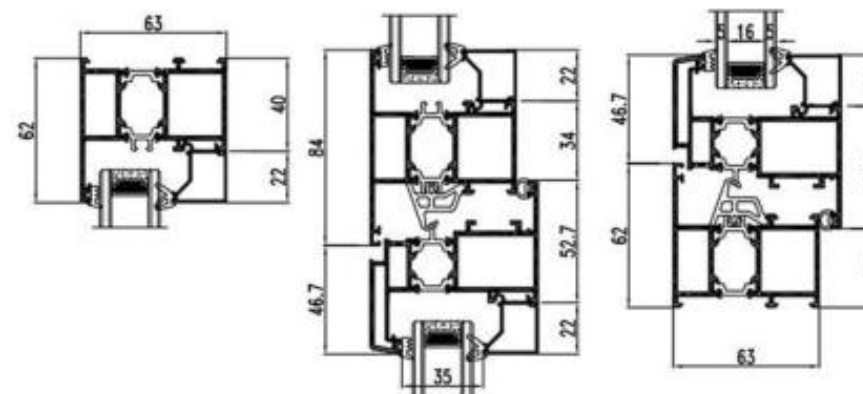

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





65 THERMAL BREAK SYSTEM TOP-HUNG WINDOW

PRODUCT PARAMETER

- Frame size:65mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-900mm
- Blade height:600mm-1800mm
- Hardware: Kin long
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENNING TYPE



MESH OPTION



PRODUCT HARDWARE

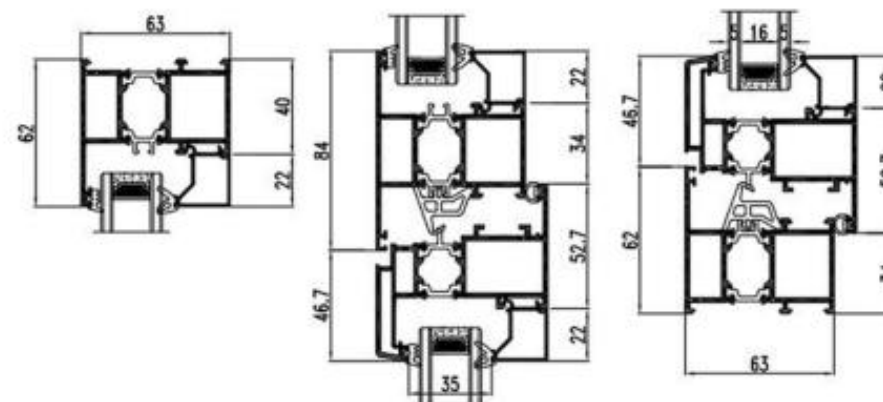

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





65 THERMAL BREAK SYSTEM WITH DOUBLE INTERNAL WINDOWS

PRODUCT PARAMETER

- Frame size: 65mm
- Thickness: 2.0mm
- Glass style: Double Tempered glass/Triple glass with two argon gaps
- Bearing: 60KG
- Blade width: 600mm-900mm
- Blade height: 600mm-1800mm
- Hardware: Kin long
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENING TYPE



MESH OPTION



PRODUCT HARDWARE

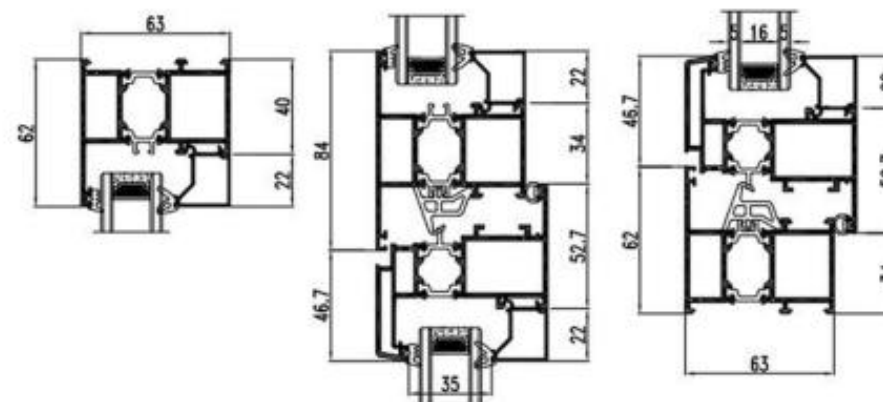

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



YUNBAI HOME

云白家居





90 THERMAL BREAK SYSTEM CASEMENT WINDOW (NFRC\CSA)

PRODUCT PARAMETER

- Frame size:90mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-900mm
- Blade height:600mm-1800mm
- Hardware:VBH
- Surface Processing: PVDF,Powder coating,Anodizing
- Color: White, Coffee,Black,Grey,Accept Custom-made



AAMA-tested and NFRC-certified high-performance casement windows, The structure is flexible, and it can be opened inwardly, outwardly, overhung, tilted and rotated, etc. Glue injection process to increase corner strength Indoor rubber strip seal, easy to install and replace the glass


OPENNING TYPE



MESH OPTION



PRODUCT HARDWARE

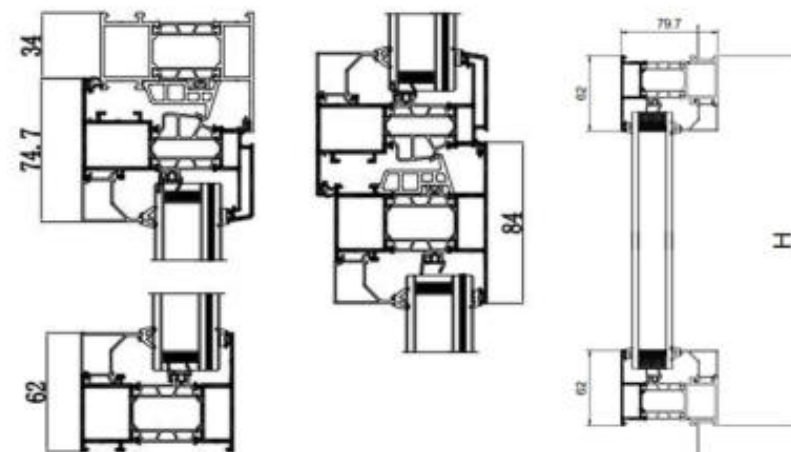

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



AAMA-tested and NFRC-certified high-performance casement windows, The structure is flexible, and it can be opened inwardly, outwardly, overhung, tilted and rotated, etc. Glue injection process to increase corner strength Indoor rubber strip seal, easy to install and replace the glass



90 THERMAL BREAK SYSTEM TOP-HUNG WINDOW (NFRC/CSA)

PRODUCT PARAMETER

- Frame size:90mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-1500mm
- Blade height:800mm-2000mm
- Hardware:VBH
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



AAMA-tested and NFRC-certified high-performance casement windows. The structure is flexible, and it can be opened inwardly, outwardly, overhung, tilted and rotated, etc. Glue injection process to increase corner strength. Indoor rubber strip seal, easy to install and replace the glass.


OPENNING TYPE



MESH OPTION



PRODUCT HARDWARE

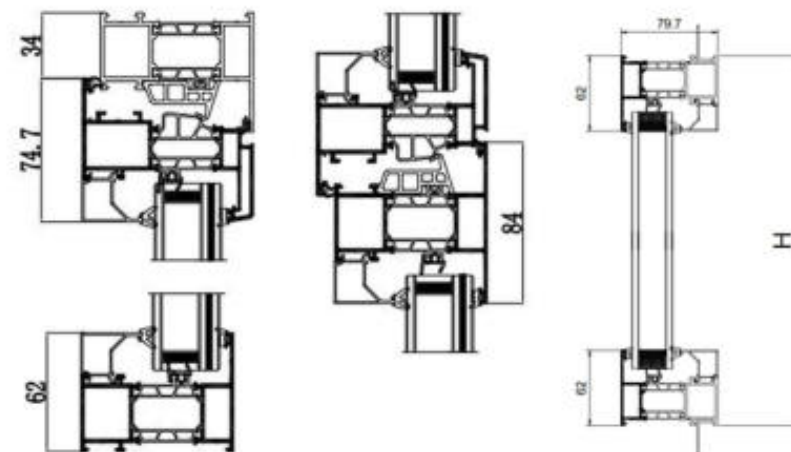

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



YUNBAI HOME

云白家居



AAMA-tested and NFRC-certified high-performance casement windows, The structure is flexible, and it can be opened inwardly, outwardly, overhung, tilted and rotated, etc. Glue injection process to increase corner strength Indoor rubber strip seal, easy to install and replace the glass



90 THERMAL BREAK SYSTEM WITH TILT&TURN WINDOWS (NFRC\CSA)

PRODUCT PARAMETER

- Frame size:90mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-900mm
- Blade height:600mm-1800mm
- Hardware:VBH
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



AAMA-tested and NFRC-certified high-performance casement windows. The structure is flexible, and it can be opened inwardly, outwardly, overhung, tilted and rotated, etc. Glue injection process to increase corner strength. Indoor rubber strip seal, easy to install and replace the glass.


OPENNING TYPE



MESH OPTION



PRODUCT HARDWARE

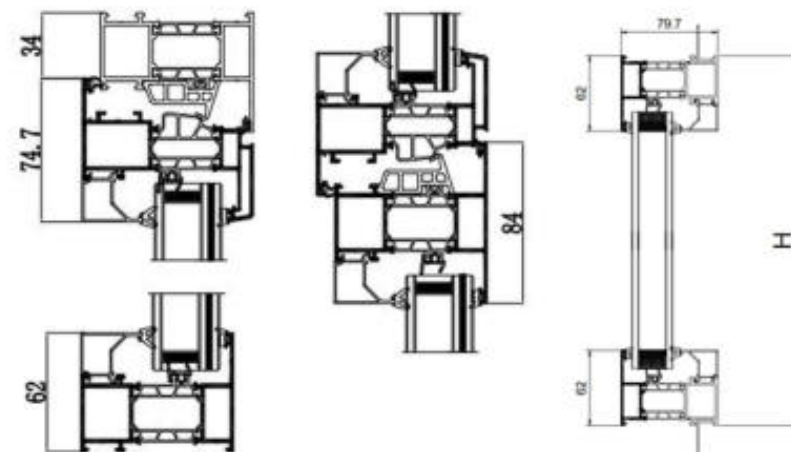

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT




AAMA-tested and NFRC-certified high-performance casement windows, The structure is flexible, and it can be opened inwardly, outwardly, overhung, tilted and rotated, etc. Glue injection process to increase corner strength Indoor rubber strip seal, easy to install and replace the glass



90 THERMAL BREAK SYSTEM AMERICAN -STYLE HAND-CRANKED WINDOW

PRODUCT PARAMETER

- Frame size:90mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-900mm
- Blade height:600mm-1800mm
- Hardware:Chinese brand
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made

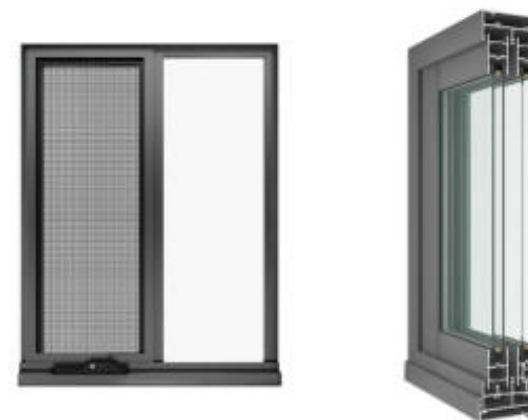


OPENING TYPE



MESH OPTION



PRODUCT HARDWARE

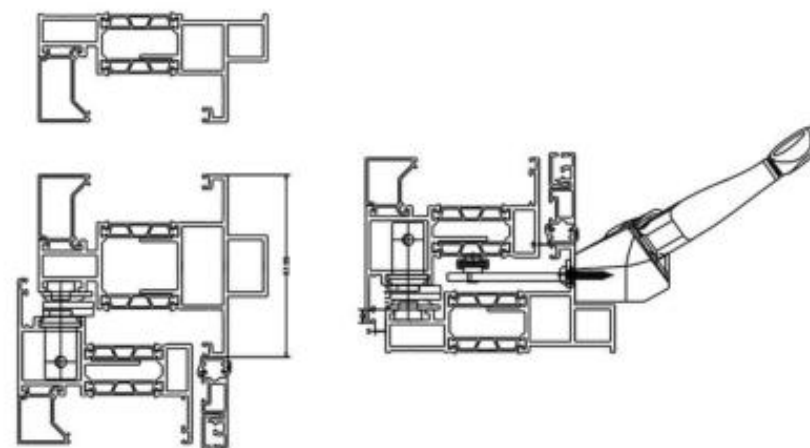

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT






100 THERMAL BREAK SYSTEM AMERICAN -STYLE HAND-CRANKED WINDOW

PRODUCT PARAMETER

- Frame size:100mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-900mm
- Blade height:600mm-1800mm
- Hardware:Chinese brand
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made

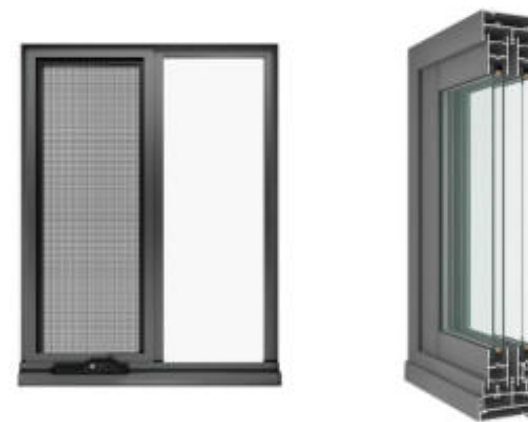


OPENING TYPE



MESH OPTION



PRODUCT HARDWARE

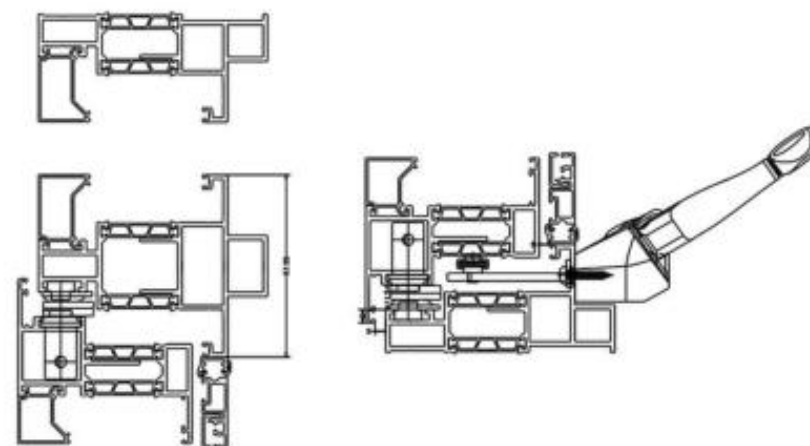

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT






100 THERMAL BREAK SYSTEM AMERICAN -STYLE HAND-CRANKED TOP-HUNG WINDOW

PRODUCT PARAMETER

- Frame size:100mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-900mm
- Blade height:600mm-1800mm
- Hardware:Chinese brand
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made

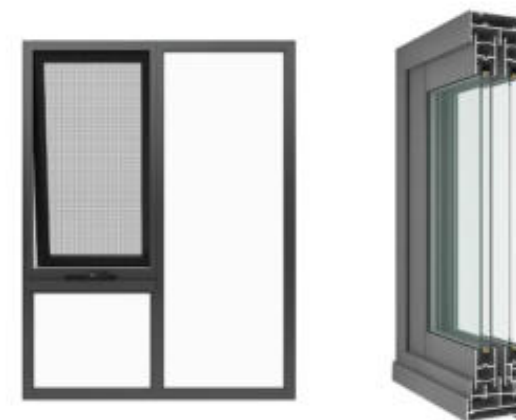


OPENNING TYPE



MESH OPTION



PRODUCT HARDWARE

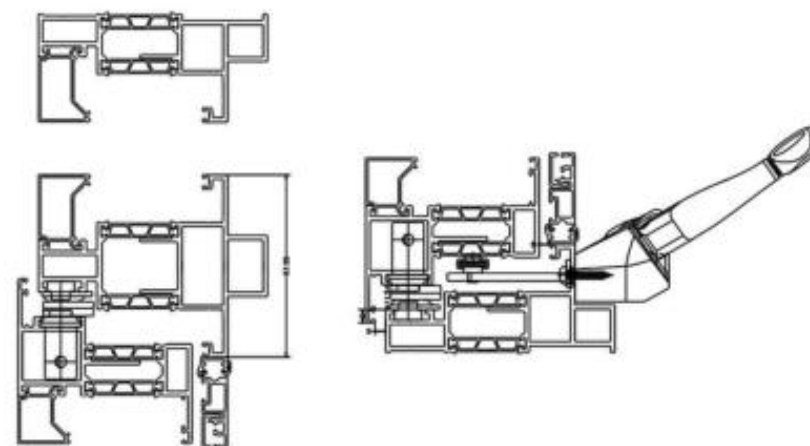

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





108 THERMAL BREAK SYSTEM CASEMENT WINDOW (CSA CERTIFICATE)

PRODUCT PARAMETER


- Frame size:108mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:80KG
- Blade width:600mm-900mm
- Blade height:600mm-1800mm
- Hardware:VBH
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENNING TYPE



MESH OPTION

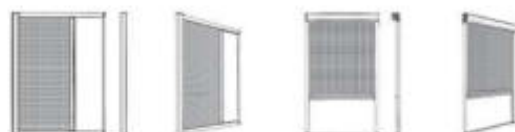

PRODUCT HARDWARE

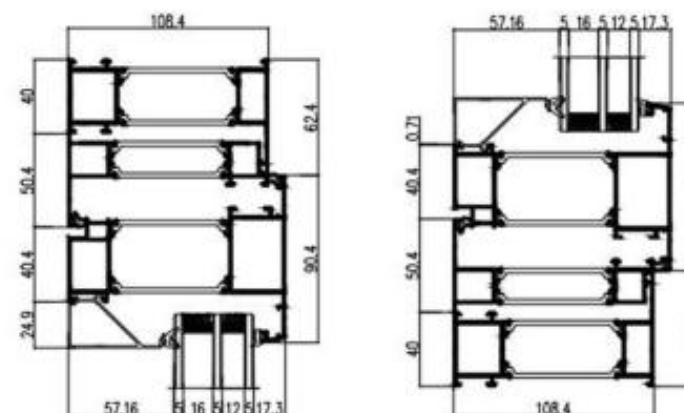

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





108 THERMAL BREAK SYSTEM TOP-HUNG WINDOW (CSA CERTIFICATE)

PRODUCT PARAMETER

- Frame size:108mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:80KG
- Blade width:600mm-1500mm
- Blade height:800mm-2000mm
- Hardware:VBH
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENNING TYPE



MESH OPTION



PRODUCT HARDWARE

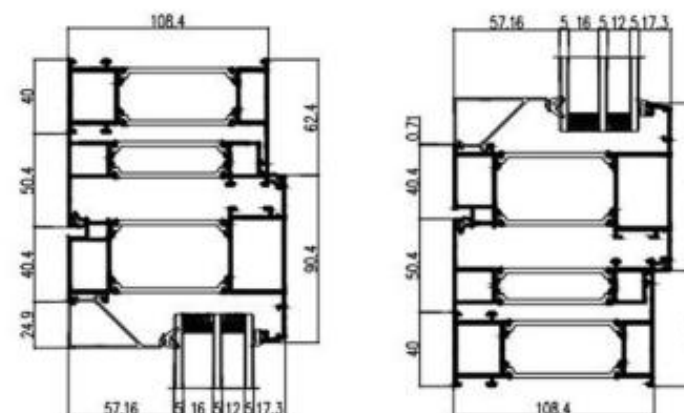

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





136 THERMAL BREAK SYSTEM WINDOW WITH SCREEN

PRODUCT PARAMETER

- Frame size:136mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-900mm
- Blade height:600mm-1800mm
- Hardware:Clayson
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENNING TYPE



MESH OPTION



PRODUCT HARDWARE

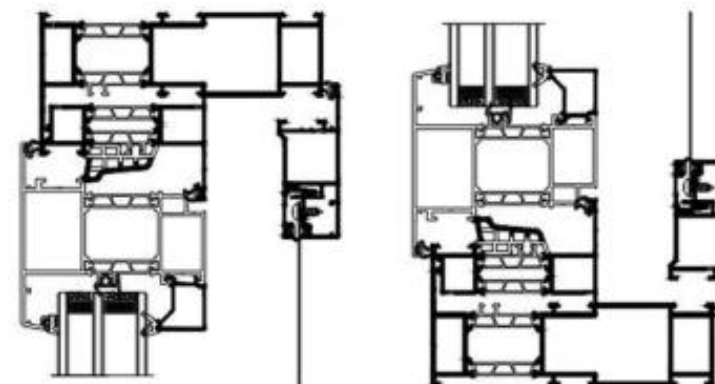

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





55 NON THERMAL BREAK CASEMENT WINDOW (CS2047)

PRODUCT PARAMETER

- Frame size:55mm
- Thickness:1.4mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:400mm-800mm
- Blade height:400mm-1500mm
- Hardware:Kinlong Handles and Chinese brand Window Crank
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



OPENNING TYPE





MESH OPTION



PRODUCT HARDWARE



Non-insulated Australian standard hanging window and casement window Home improvement series, has passed the highest testing and certification of AS2047 The profile structure with waterproof wood board or sub-frame is more convenient for installation

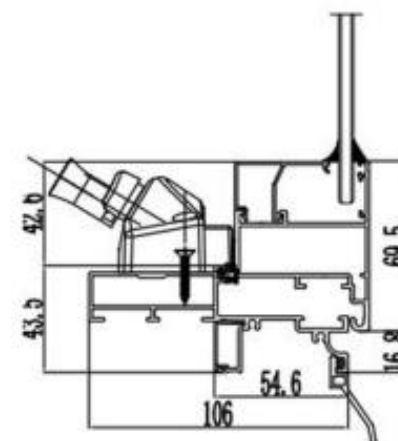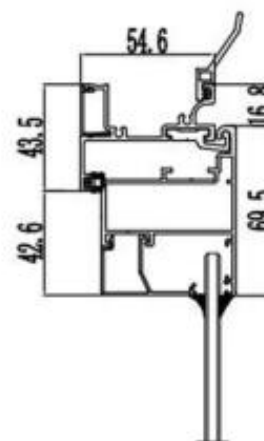

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



Non-insulated Australian standard hanging window and casement window Home improvement series, has passed the highest testing and certification of AS2047 The profile structure with waterproof wood board or sub-frame is more convenient for installation



55 NON THERMAL BREAK TOP-HUNG WINDOW (CS2047)

PRODUCT PARAMETER

- Frame size:55mm
- Thickness:1.4mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Double tempered hollow 5mm+12A+5mm"
- Bearing:60KG
- Blade width:400mm-800mm
- Blade height:400mm-1500mm
- Hardware:Kinlong Handles and Chinese brand Window Crank
- Surface Processing: PVDF,Powder coating,Anodizing
- Color: White, Coffee,Black,Grey,Accept Custom-made



OPENNING TYPE





MESH OPTION



PRODUCT HARDWARE



Non-insulated Australian standard hanging window and casement window Home improvement series, has passed the highest testing and certification of AS2047 The profile structure with waterproof wood board or sub-frame is more convenient for installation

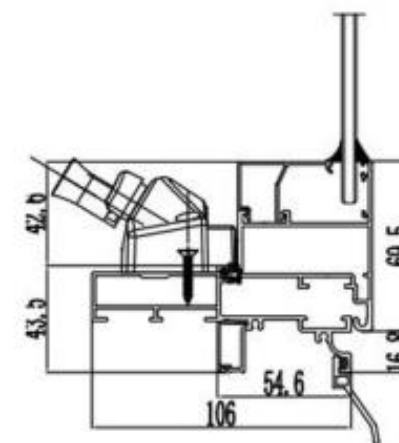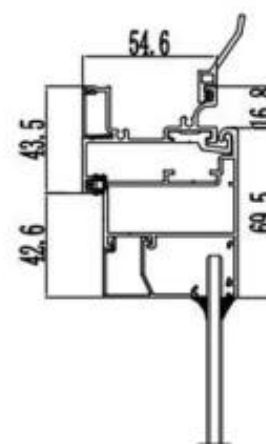

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



Non-insulated Australian standard hanging window and casement window Home improvement series, has passed the highest testing and certification of AS2047 The profile structure with waterproof wood board or sub-frame is more convenient for installation



100 NON THERMAL BREAK CASEMENT WINDOW

PRODUCT PARAMETER

- Frame size:100mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:80KG
- Blade width:600mm-1500mm
- Blade height:600mm-2400mm
- Hardware:Kinlong Handles and Bonway Window Crank
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



OPENING TYPE




MESH OPTION



PRODUCT HARDWARE



Non-insulated sliding window of Australian system, We can make a variety of design schemes for two-track, three-track and three-track belt gauze. The profile structure with waterproof board or sub-frame is more convenient for installation. The sliding window is easy to use, low maintenance cost and economical.

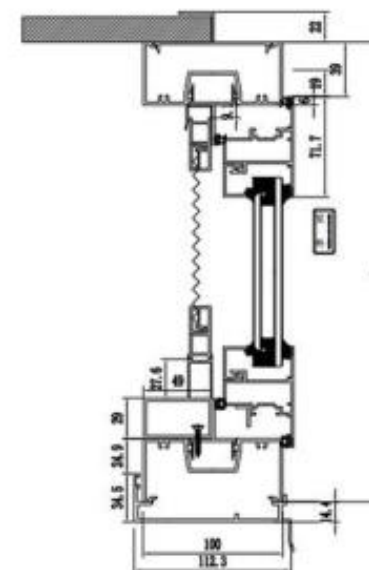

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



Non-insulated sliding window of Australian system, We can make a variety of design schemes for two-track, three-track and three-track belt gauze. The profile structure with waterproof board or sub-frame is more convenient for installation. The sliding window is easy to use, low maintenance cost and economical.



100 NON THERMAL BREAK TOP-HUNG WINDOW

PRODUCT PARAMETER

- Frame size:100mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:80KG
- Blade width:600mm-1500mm
- Blade height:600mm-2400mm
- Hardware:Kinlong Handles and Bangwei Window Crank
- Color Processing: Fluorocarbon Process - Crushed Sparkling Coffee, Tungsten Steel Sparkling Ash
- Powder coating: Flange white, Rainflower stone, Gran coffee, Sand black



OPENNING TYPE




MESH OPTION



PRODUCT HARDWARE



Non-insulated sliding window of Australian system, We can make a variety of design schemes for two-track, three-track and three-track belt gauze. The profile structure with waterproof board or sub-frame is more convenient for installation. The sliding window is easy to use, low maintenance cost and economical.

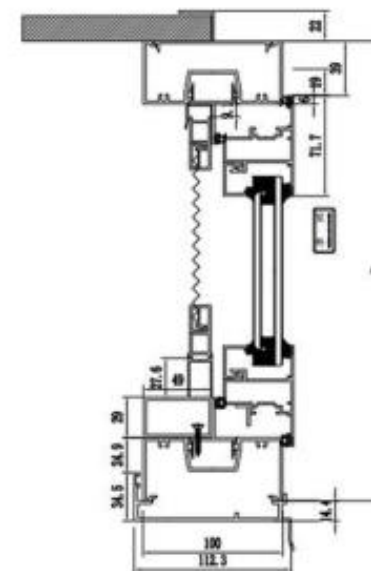

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT




Non-insulated sliding window of Australian system, We can make a variety of design schemes for two-track, three-track and three-track belt gauze. The profile structure with waterproof board or sub-frame is more convenient for installation. The sliding window is easy to use, low maintenance cost and economical.



100 NON THERMAL BREAK LOUVER WINDOW

PRODUCT PARAMETER

- Frame size:100mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:80KG
- Blade width:600mm-1500mm
- Blade height:600mm-2400mm
- Hardware:Kinlong Handles and Bangwei Window Crank
- Surface Processing: PVDF,Powder coating,Anodizing
- Color: White, Coffee,Black,Grey,Accept Custom-made

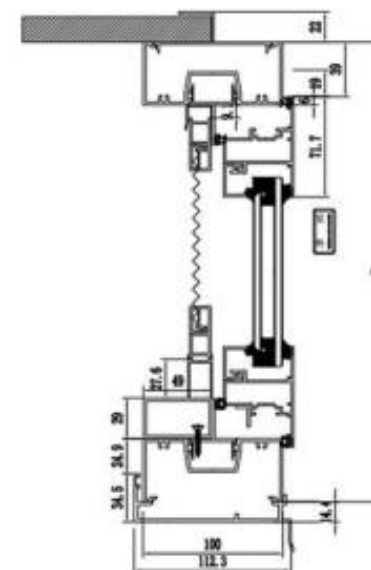

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





AS65 THERMAL BREAK SYSTEM TOP-HUNG WINDOW

PRODUCT PARAMETER

- Frame size:65mm
- Thickness:1.4mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:400mm-800mm
- Blade height:400mm-1500mm
- Hardware:Chinese brand Window Crank
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENNING TYPE



MESH OPTION



PRODUCT HARDWARE

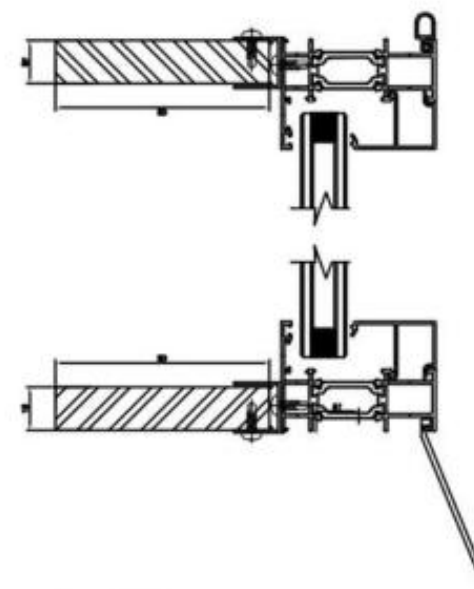

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



YUNBAI HOME
云白家居






80 THERMAL BREAK SYSTEM SLIDING WINDOW

PRODUCT PARAMETER

- Frame size:80mm
- Thickness:1.4mm-2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-1500mm
- Blade height:1000mm-2000mm
- Hardware:Flush lock
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENING TYPE

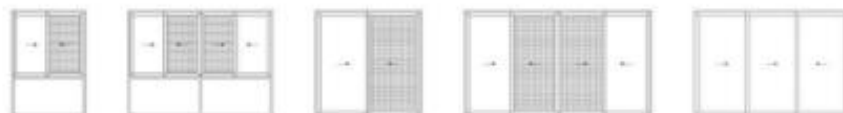

MESH OPTION



PRODUCT HARDWARE

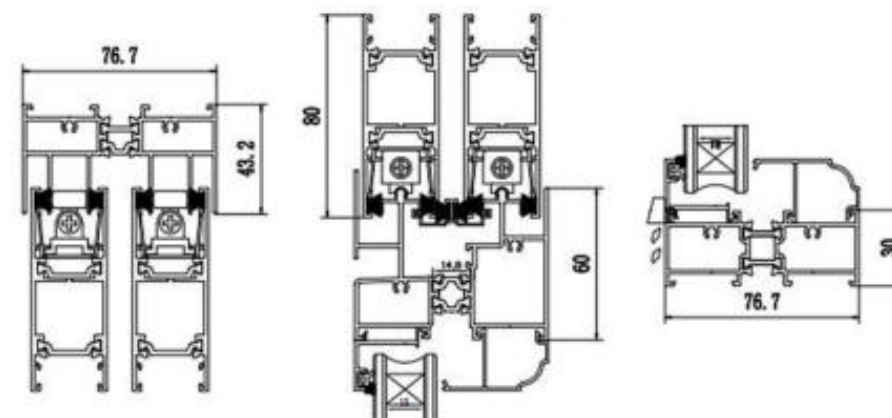

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



YUNBAI HOME

云白家居






150 THERMAL BREAK SYSTEM SLIDING WINDOW (NFRC/CSA)

PRODUCT PARAMETER

- Frame size:150mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:80KG
- Blade width:600mm-1500mm
- Blade height:1000mm-2000mm
- Hardware:VBH
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made

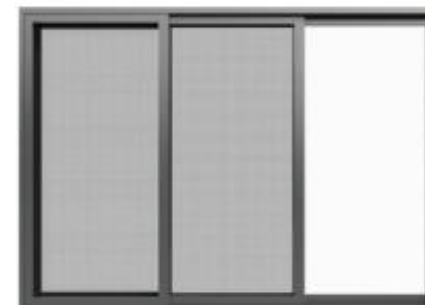

EPDM (EPDM) sealing strip, strong weather resistance, environmental protection, no odor, with excellent watertight and airtight performance


OPENING MODE



OPTIONSL MESH



PRODUCT HARDWARE

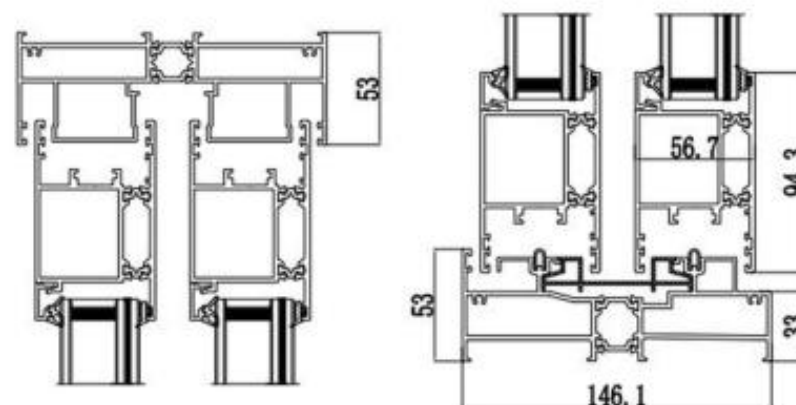

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



YUNBAI HOME

云白家居



EPDM (EPDM) sealing strip, strong weather resistance, environmental protection, no odor, with excellent watertight and airtight performance




87 NON THERMAL BREAK SLIDING WINDOW

PRODUCT PARAMETER

- Frame size:87mm
- Thickness:1.4mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-800mm
- Blade height:600mm-1500mm
- Hardware:Chinese brand
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENING TYPE

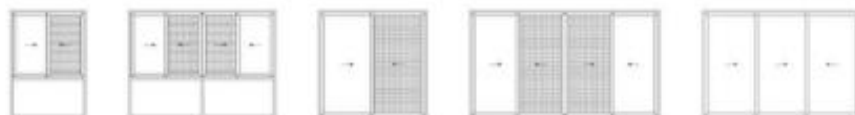

MESH OPTION



PRODUCT HARDWARE

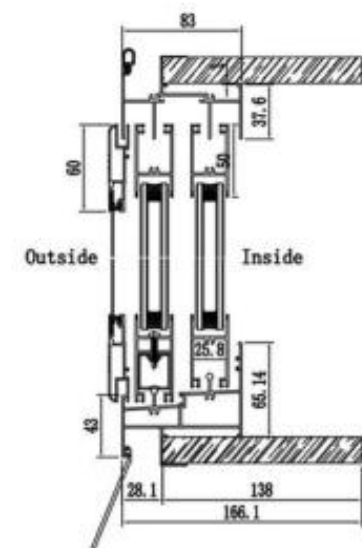

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS




WIND RESISTANT



YUNBAI HOME

云白家居

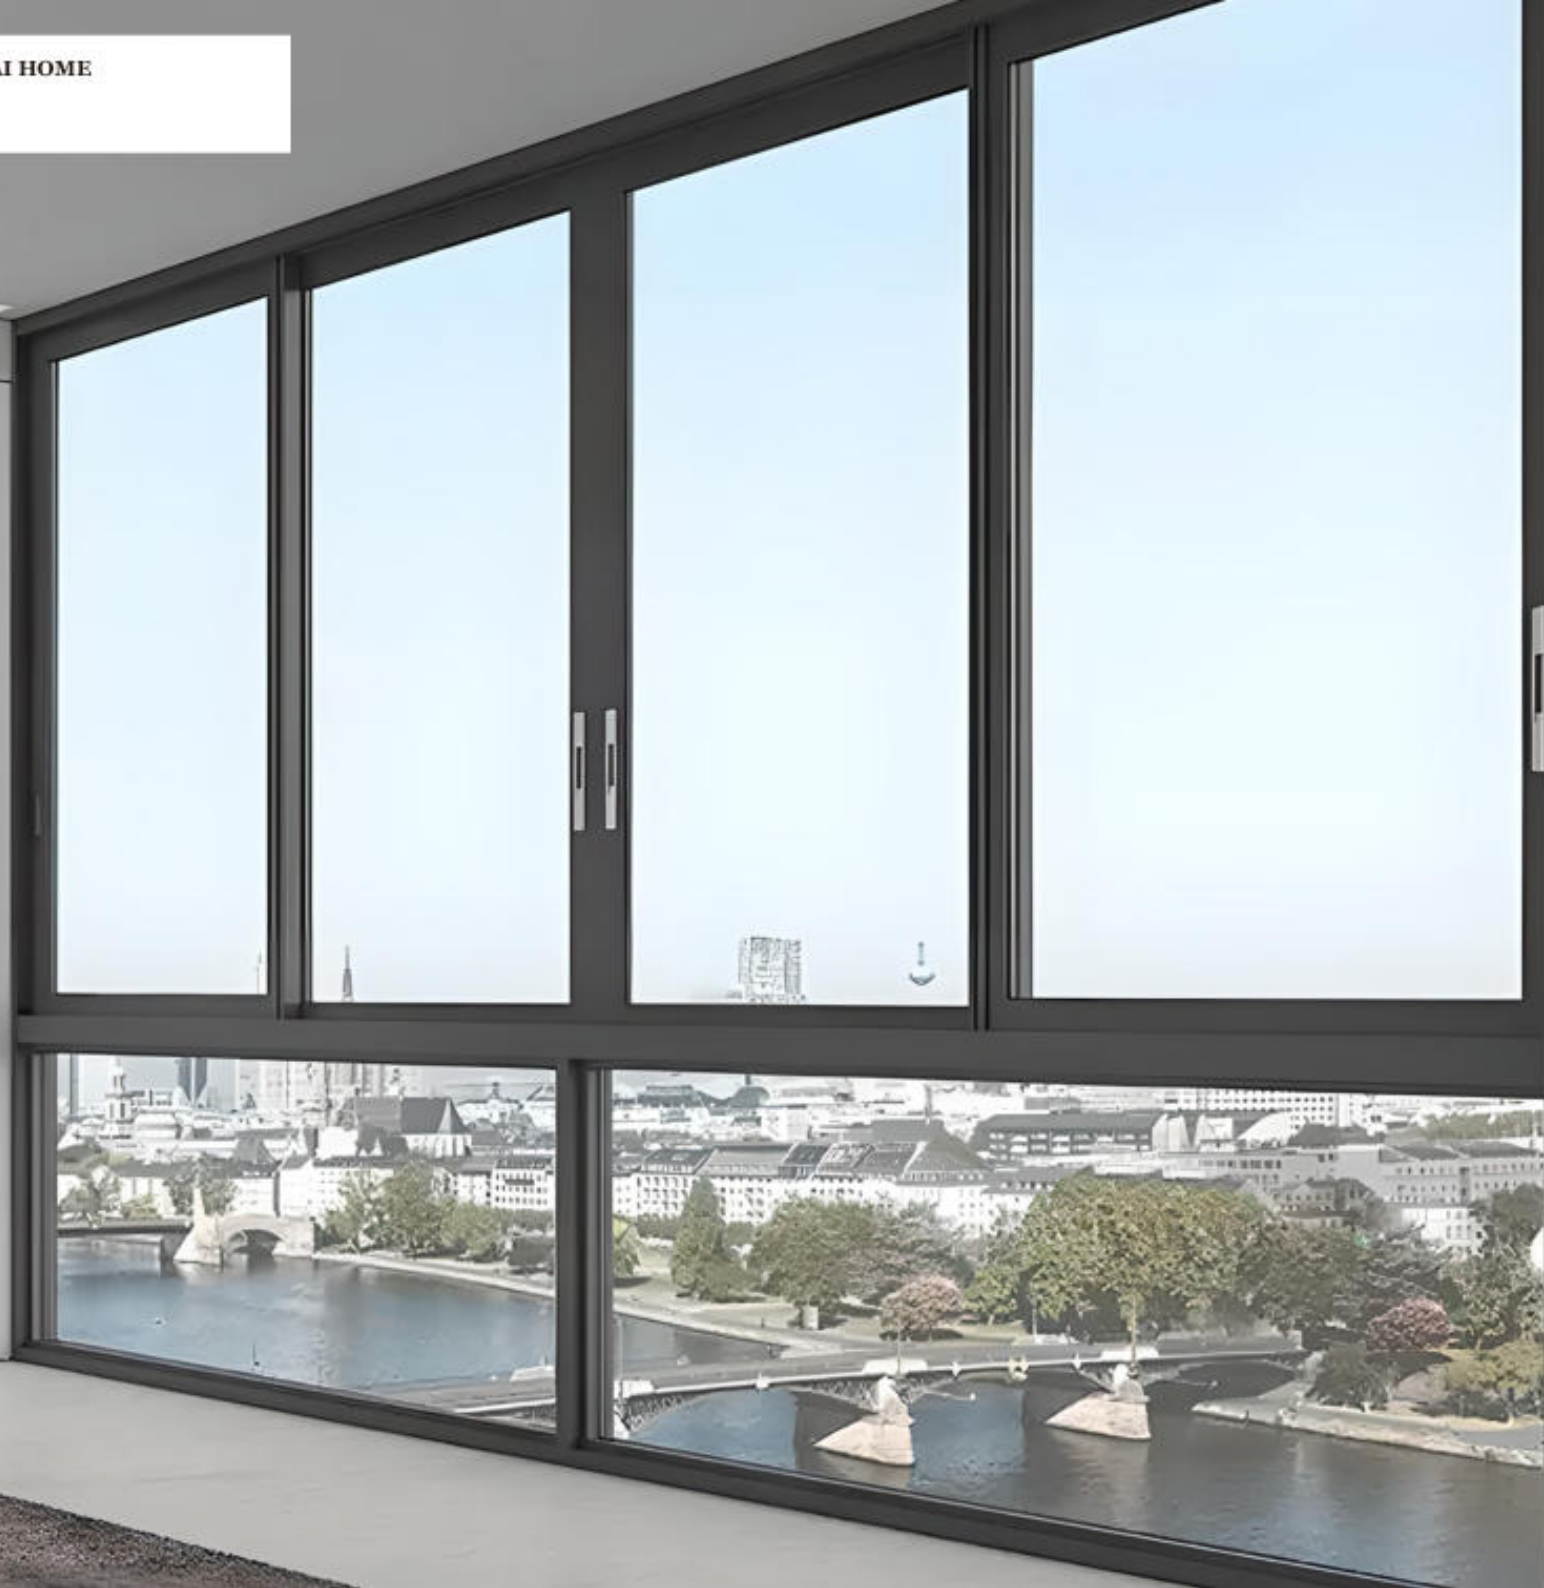



80 THERMAL BREAK SYSTEM FOLDING WINDOW

PRODUCT PARAMETER


- Frame size:80mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:60KG
- Blade width:600mm-900mm
- Blade height:1000mm-2000mm
- Hardware:Kerssenberg
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



OPENING TYPE



PRODUCT HARDWARE

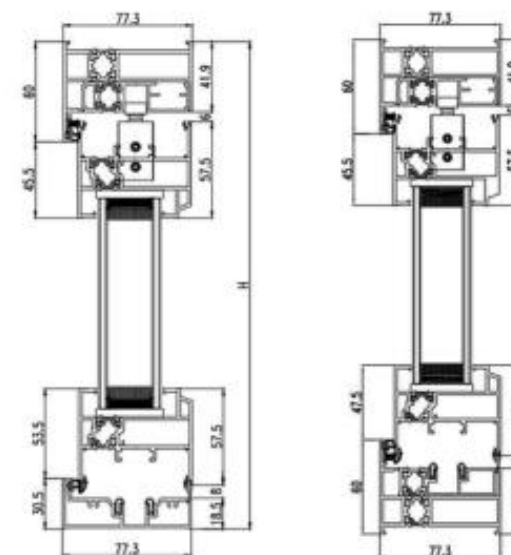

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





65 THERMAL BREAK SYSTEM SWING DOOR

PRODUCT PARAMETER

- Frame size: 65mm
- Thickness: 2.0mm
- Glass style: Double Tempered glass/Triple glass with two argon gaps
- Bearing: 100KG
- Blade width: 600mm-1000mm
- Blade height: 1500mm-3500mm
- Hardware: Kinlong
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENING TYPE



PRODUCT HARDWARE



CE certified products with the highest performance, three performance testing, creating a record for Intertek. The overall sealing system of the European standard system is super durable and can effectively ensure the airtightness, watertightness and sound insulation performance.

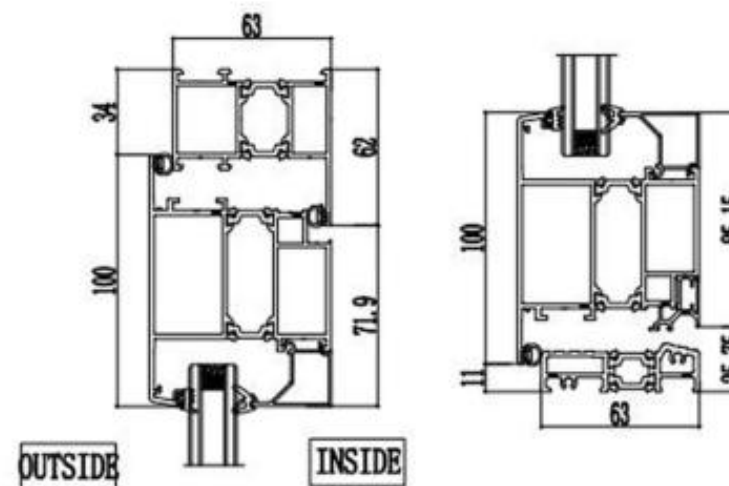

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



CE certified products with the highest performance, three performance testing, creating a record for Intertek The overall sealing system of the European standard system is super durable and can effectively ensure the airtightness, watertightness and sound insulation performance.




90 THERMAL BREAK SYSTEM SWING DOOR (NFRC)

PRODUCT PARAMETER

- Frame size:90mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:120KG
- Blade width:600mm-1000mm
- Blade height:1500mm-3500mm
- Hardware:VBH
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made




OPENING TYPE

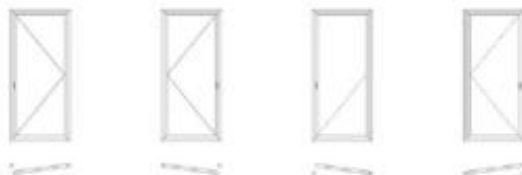

PRODUCT HARDWARE



CE certified products with the highest performance, three performance testing, creating a record for Intertek. The overall sealing system of the European standard system is super durable and can effectively ensure the airtightness, watertightness and sound insulation performance.

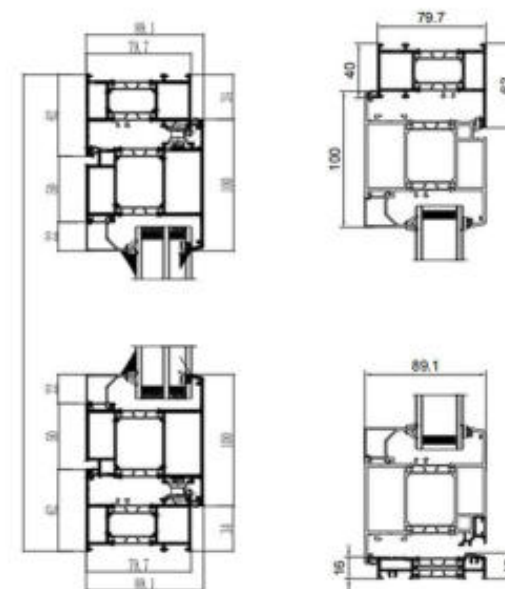

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



CE certified products with the highest performance, three performance testing, creating a record for Intertek The overall sealing system of the European standard system is super durable and can effectively ensure the airtightness, watertightness and sound insulation performance.



AS65 THERMAL BREAK SYSTEM SWING DOOR

PRODUCT PARAMETER


- Frame size:65mm
- Thickness:1.4mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:80KG
- Blade width:600mm-900mm
- Blade height:600mm-2400mm
- Hardware:Kinlong
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



OPENING TYPE



PRODUCT HARDWARE

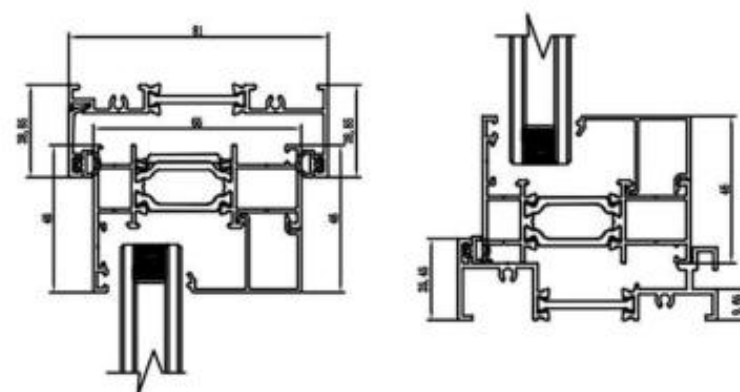

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



CE certified products with the highest performance, three performance testing, creating a record for Intertek The overall sealing system of the European standard system is super durable and can effectively ensure the airtightness, watertightness and sound insulation performance.



100 NON THERMAL BREAK SWING DOOR

PRODUCT PARAMETER


- Frame size:100mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:80KG
- Blade width:600mm-900mm
- Blade height:600mm-2400mm
- Hardware:Kinlong
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



OPENNING TYPE



PRODUCT HARDWARE

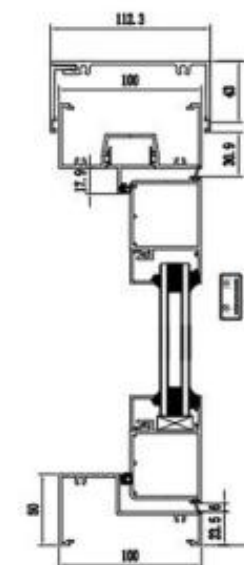

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





150 THERMAL BREAK SYSTEM SLIDING DOOR (NFRC/CSA/NAFS/AS2047)

PRODUCT PARAMETER

- Frame size:150mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:100KG
- Blade width:600mm-3000mm
- Blade height:1000mm-3500mm
- Hardware:VBH
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



OPENING TYPE




PRODUCT HARDWARE



The 150 lift sliding door system has passed 720pa AAMA Intertek testing for water tightness, and has been recognized by many customers worldwide.

Fully functional, it can be used for lifting and sliding, fixed leaf, ordinary sliding and other functions, and can

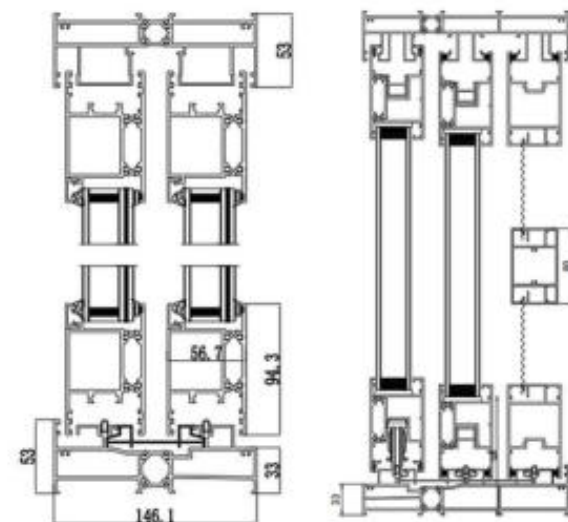

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



YUNBAI HOME

云白家居



The 150 lift sliding door system has passed 720pa AAMA Intertek testing for water tightness, and has been recognized by many customers worldwide. Fully functional, it can be used for lifting and sliding, fixed leaf, ordinary sliding and other functions, and can



125 THERMAL BREAK SYSTEM SLIM FRAME DOOR

PRODUCT PARAMETER

- Frame size:125mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:300KG
- Blade width:600mm-3000mm
- Blade height:1000mm-3500mm
- Hardware:Baobao
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made





OPENING TYPE



PRODUCT HARDWARE



EPDM (EPDM) sealing strip, strong weather resistance, environmental protection, no odor, with excellent watertight and airtight performance.

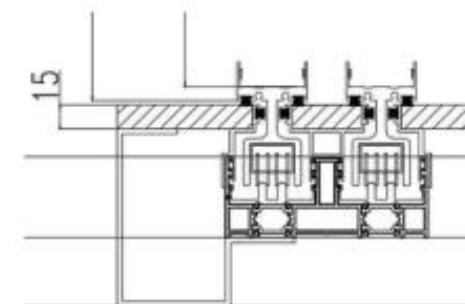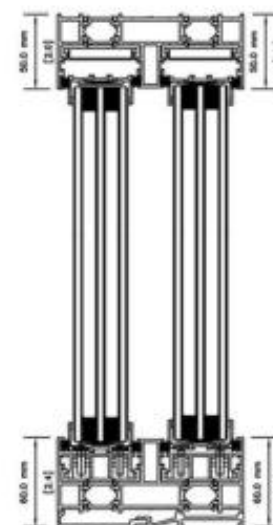

THERMAL INSULATION
 $U_w \geq 1.2 (W/m^2K)$



SOUND INSULATION
 $40SRw^*C < 45dB$



WATERPROOF
A Pz600



AIR TIGHTNESS
 $q_{ls} 1.0$



WIND RESISTANT
P3 ≥ 5.0



EPDM (EPDM) sealing strip, strong weather resistance, environmental protection, no odor, with excellent watertight and airtight performance



100 NON THERMAL BREAK SLIDING DOOR

PRODUCT PARAMETER



- Frame size:100mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:120KG
- Blade width:600mm-1500mm
- Blade height:600mm-2800mm
- Hardware:Bangwei D-Handle
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



OPENING TYPE



PRODUCT HARDWARE

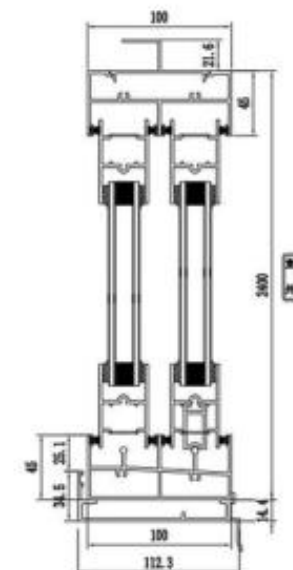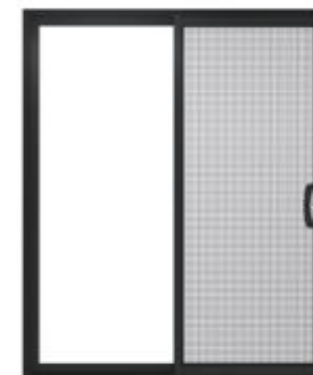

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





110 NON THERMAL BREAK SLIDING DOOR

PRODUCT PARAMETER


- Frame size:110mm
- Thickness:1.4mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:100KG
- Blade width:600mm-1300mm
- Blade height:600mm-2400mm
- Hardware:Chinese brand D-Handle
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



OPENNING TYPE



PRODUCT HARDWARE

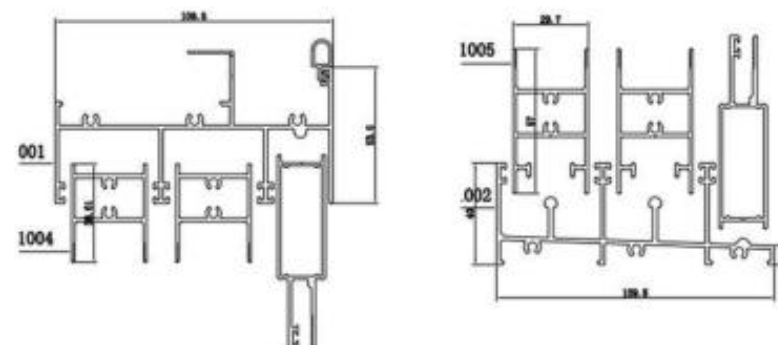

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT



YUNBAI HOME

云白家居





80 THERMAL BREAK SYSTEM FOLDING DOOR (NFRC/CAS/NAFS)

PRODUCT PARAMETER


- Frame size:80mm
- Thickness:2.0mm
- Glass style:Double Tempered glass/Triple glass with two argon gaps
- Bearing:100KG
- Blade width:600mm-1000mm
- Blade height:1000mm-3500mm
- Hardware:Kerssenberg
- Surface Processing: PVDF, Powder coating, Anodizing
- Color: White, Coffee, Black, Grey, Accept Custom-made



OPENING MODE



PRODUCT HARDWARE

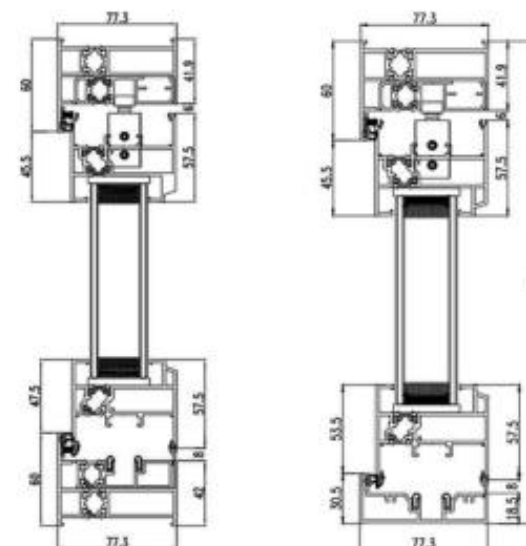

THERMAL INSULATION



SOUND INSULATION



WATERPROOF



AIR TIGHTNESS



WIND RESISTANT





YUNBAI HOME

云白家居



YUNBAI HOME

云白家居